

3 YEAR WARRANTY

At Speed Queen, we're confident that our washer-extractors are built better to last longer and we're offering the following limited warranty to prove it:

Through three years*

Any part on the entire machine.

Through five years*

The bearings and bearing seal assembly.

Through five years*

Frame, cylinder and shaft assembly.

*Parts only. Labor not included. See Speed Queen Warranty Bond for specifics.

Speed Queen

ON-PREMISES


WASHER-EXTRACTORS

18 lb. (8.16 kg) WASHER-EXTRACTOR

27 lb. (12.3 kg) WASHER-EXTRACTOR

35 lb. (15.9 kg) WASHER-EXTRACTOR

50 lb. (22.7 kg) WASHER-EXTRACTOR

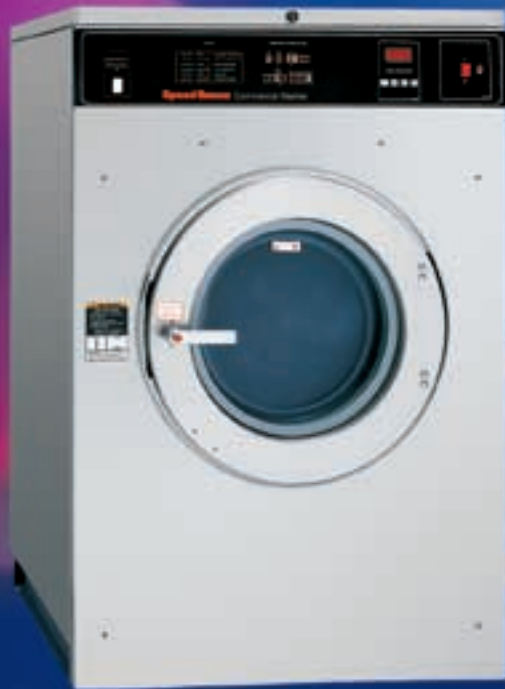

Speed Queen

OUR STRENGTH COMES FROM WITHIN

WASHER-EXTRACTOR SPECIFICATIONS

	SC18 2-speed	SC27 2-speed	SC35 2-speed	SC50 2-speed
Dry Weight Capacity	18 lb. (8.16 kg)	27 lb. (12.3 kg)	35 lb. (15.9 kg)	50 lb. (22.7 kg)
Width	26" (660 mm)	29" (737 mm)	30-1/8" (765 mm)	34-1/16" (865 mm)
Depth	29-11/16" (754 mm)	35" (889 mm)	38-1/2" (978 mm)	42" (1067 mm)
Height	42" (1067 mm)	45" (1143 mm)	47-1/4" (1200 mm)	49-3/4" (1265 mm)
Cylinder Diameter	21" (533 mm)	24" (610 mm)	26-1/4" (667 mm)	30" (762 mm)
Cylinder Depth	13-3/4" (349 mm)	16" (406 mm)	18-3/8" (467 mm)	20" (508 mm)
Cylinder Volume	2.76 cu. ft. (78 liters)	4.19 cu. ft. (118 liters)	5.76 cu. ft. (163 liters)	8.18 cu. ft. (230 liters)
Door Opening Size	12" (305 mm)	14-11/32" (364 mm)	13-15/16" (354 mm)	16-1/4" (413 mm)
Door Bottom to Floor	14.375" (365 mm)	14" (356 mm)	16" (406 mm)	13.5" (343 mm)
G-Factor (High Ext.)	82	78	82	86
Wash Speed	53 rpm	47 rpm	47 rpm	44 rpm
High Extract	525 rpm	480 rpm	470 rpm	450 rpm
Water Connection (2 each)	3/4" (19 mm)	3/4" (19 mm)	3/4" (19 mm)	3/4" (19 mm)
Drain Diameter	2" (52 mm)	2" (52 mm)	2" (52 mm)	3" (76 mm)
Drain Height to Floor	4-3/8" (111 mm)	4" (102 mm)	4" (102 mm)	4-1/2" (114 mm)
Motor HP (Wash)	0.18 HP (0.13 kW)	0.25 HP (0.19 kW)	0.40 HP (0.30 kW)	0.55 HP (0.41 kW)
Motor HP (Extract)	1.0 HP (0.75 kW)	1.4 HP (1.04 kW)	1.8 HP (1.3 kW)	2.7 HP (2.01 kW)
Electrical Specifications, Circuit Breaker Requirements and Full Load Amperages*				
Voltage	110-120/60/1			
Circuit Breaker-F.L.A	20-15 amps			
Voltage	208-240/60/1	208-240/60/1	208-240/60/1	
Circuit Breaker-F.L.A	20-10 amps	20-10.5 amps	25-12 amps	
Voltage	208-240/60/3	208-240/60/3	208-240/60/3	208-240/60/3
Circuit Breaker-F.L.A	15-5 amps	15-7 amps	20-7 amps	20-10 amps
Voltage			440-480/60/3	440-480/60/3
Circuit Breaker-F.L.A			15-5 amps	15-6 amps
International Electrical Specifications, Circuit Breaker Requirements and Full Load Amperages*				
Voltage	380-415/50/3	380-415/50/3	380-415/50/3	380-415/50/3
Circuit Breaker-F.L.A	15-4 amps	15-4 amps	15-5 amps	15-6 amps
Voltage	220-240/50/3	220-240/50/3	220-240/50/3	220-240/50/3
Circuit Breaker-F.L.A	15-5 amps	15-6 amps	20-7 amps	20-10 amps
Voltage	220-240/50/1	220-240/50/1	220-240/50/1	
Circuit Breaker-F.L.A	20-10 amps	20-10 amps	25-12 amps	
Voltage	200/50/3	200/50/3	200/50/3	200/50/3
Voltage	200/60/3	200/60/3	200/60/3	200/60/3
Shipping Dimensions (Domestic Approx.)	Height: 51" (1295 mm) Width: 29" (737 mm) Depth: 32.5" (826 mm)	Height: 53.5" (1359 mm) Width: 30.5" (775 mm) Depth: 37.5" (953 mm)	Height: 56" (1422 mm) Width: 32" (813 mm) Depth: 41" (1041 mm)	Height: 58.5" (1486 mm) Width: 35.63" (905 mm) Depth: 44.25" (1124 mm)
Net Weight	390 lb. (177 kg)	495 lb. (225 kg)	650 lb. (295 kg)	820 lb. (373 kg)
Shipping Weight (Dom.)	410 lb. (186 kg)	535 lb. (243 kg)	680 lb. (309 kg)	875 lb. (398 kg)
(Export)	480 lb. (218 kg)	605 lb. (272 kg)	760 lb. (345 kg)	1020 lb. (464 kg)

*Standard domestic voltage 208-240/60/3 (3-wire), standard international 380-415/50/3 (4-wire). Circuit breaker and amp draw data shown is for standard voltage models without auxiliary heat. Consult factory for other configurations. Manufacturer strongly recommends using a circuit breaker instead of fuses. Use 3-pole circuit breakers for 3-phase machines. Due to continuous product improvements, design and specifications subject to change without notice. Features and certifications may vary by model. The quality management systems at all Alliance Laundry Systems facilities have been awarded ISO 9001 certification. All models are all ETL, ETLc, and CE (pending on some models).



www.speedqueen.com

Speed Queen
Alliance Laundry Systems

LET SPEED QUEEN LEAD THE WAY...

As America's largest commercial laundry equipment manufacturer, Speed Queen stands for quality, convenience, and efficiency. We've integrated innovative technology with proven commercial quality to provide on-premise laundries with state-of-the-art, cost effective laundry units. Since 1908 we have been committed to our tradition of quality products, backed by superior customer service.

MicroMaster™ System

Today's on-premise laundry rooms need laundry equipment that is flexible, reliable, and delivers excellent cleanability every time. The MicroMaster™ Laundry System from Speed Queen does just that. Speed Queen has developed a system of washer-extractors and tumblers that work in harmony with each other to fulfill these basic needs and exceed expectations.

The MicroMaster™ Laundry System is designed with versatile

flexibility

programming for a wide range of laundering options. Together the washer-extractors and tumblers have over 30 factory preset or customized cycles to choose from. Once programmed, your laundry results are the same no matter who does the laundry or when.

CLEANABILITY

Linens last longer when they receive the right care. MicroMaster™ washer-extractors combine cycle flexibility with programmable water temperatures for excellent fabric care and more efficient usage of chemical supplies. And a reversing option on the MicroMaster™ tumblers prevents tangles in large loads. Now sheets, blankets, and other oversized items stay separated and dry evenly.



RELIABILITY

At Speed Queen we're confident that our washer-extractors and tumblers are built better to last longer, and we are offering a three-year limited warranty* to prove it.

WASHER-EXTRACTORS



Large Door Opening

Large door opening makes loading and unloading fast and easy. Our heavy-duty stainless steel door features vacuum tight



sealing to keep water inside the machine where it belongs. Constructed with heat treated, shatter-proof circular door glass and door lock, operators can watch safely the wash process.

Heavy-Duty Bearings and Trunion Assembly

Designed to withstand heavy commercial use, our sealed heavy-duty bearings require no lubrication, permanently!

Heavy Duty Construction

Durable 304 stainless steel cabinet front, sides and top, as well as inner and outer tubs, won't corrode, chip, crack or pit in normal use, and they're extremely rust resistant. Our heavy-duty Gamma A-Frame stands up to even the toughest laundry conditions, keeping Speed Queen washer-extractors durable for years to come.



Superior Serviceability

Speed Queen's removable top and front panel are designed for minimum down time and ease of service. Troubleshooting electrical systems, as well as accessing drain valve components is easier than ever.



Automatic Supply Injection

The benefits of our Automatic Supply Injection System will show up in reduced waste of detergents and more consistent laundry results. Self-cleaning, multi-compartment dispenser automatically dispenses detergent for prewash, detergent for main wash and fabric softener for final rinse. In addition, tubing and electrical connections are provided on the rear of the machine for easy on-site hook-up to a liquid central supply system.



Heating Options

Speed Queen models heat water via steam or electricity. You choose the heating option that best fits your on-premise laundry room.

Control Options



Fully Programmable Electronic Control

The MicroMaster™ microprocessor control provides a variety of special features for optimum convenience. It offers you a total of 30 programs to choose from including 12 factory preset programs and 18 programmable options for automatic operation. Any part or all of the programs can be erased or modified, giving you the flexibility to customize your on-premise laundry to meet specific needs. The programmable steps include three water levels, temperature-controlled fill, automatic cooldown, temperatures (80 to 190° F / 27 to 88° C) available with auto heating, auto supply injection, rotation time options, step time, and extract time.

The MicroMaster™ microprocessor also provides additional time-saving conveniences, including an end-of-cycle signal, temperature readout, time remaining in cycle, and cycle count report.



Push Button Control

Four preset wash formulas offer a choice of hot, for heavy soil and whites; warm, for medium soil and whites; warm for light soil and permanent press; cold, for all cold water wash, delicates, knits and lightly soiled fabrics. These four cycle selections vary length of wash, wash action and length of final spin. You can depend on Speed Queen to get clothes their cleanest day after day.